PLANNING & DEVELOPMENT DEPARTMENT

CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission

ITEM B8 November 5, 2026 1235 Allston Street
HPO File #: HP2026_0308 Houston Heights West

Applicant: Sam Gianukos, agent for Lambert Arceneaux, owner

Property: 1235 Allston Street, Lots 6 and Tract 5 of Block 184 in the Houston Heights Subdivision. The property is a 1,576 square foot one-story wood single-family residence situated on a 6,600 square foot (50' by 132') interior lot.

Significance: Contributing Queen Anne property constructed circa 1910, located in the Houston Heights West Historic District.

Proposal: Alteration – Addition

The applicant proposes to construct a two-story addition to the rear of a one-story home.

- 10 existing metal windows will be replaced with new wood, 1-over-1, double hung wood windows to match the original openings. The original openings are largely obscured by siding and wall finishing and staff will verify size and location after demo reveals original openings.
- Non original porch enclosure will be removed to restore the previous wrap-around porch.
- Non-original rear addition to be removed.
- Existing 1,576 square foot home will consist of 2,852 square feet with the proposed addition.
- Addition will feature an eave height of 22' (7' side setback) and a ridge height of 28' 9".
- All new windows need to be inset and recessed. See Attachment A for details.

Public Comment: No public comment received.

Civic Association: No civic association comment received.

Recommendation: **Approval With Conditions-Staff to verify previous window openings during construction**

HAHC Action: -

DRAFT

CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission

ITEM B8 November 5, 2026 1235 Allston Street
HPO File #: HP2026_0308 Houston Heights West

APPROVAL CRITERIA

ALTERATIONS, REHABILITATIONS, RESTORATIONS AND ADDITIONS

Sec. 33-241: HAHC shall issue a certificate of appropriateness for the alteration, rehabilitation, restoration or addition of an exterior feature of (i) any landmark, (ii) protected landmark, (iii) any building, structure or object that is part of an archaeological site, or (iv) contributing building in a historic district upon finding that the application satisfies the following criteria, as applicable:

S	D	NA		S - satisfies D - does not satisfy NA - not applicable
☒	☐	☐	(1)	The proposed activity must retain and preserve the historical character of the property;
☒	☐	☐	(2)	The proposed activity must contribute to the continued availability of the property for a contemporary use;
☒	☐	☐	(3)	The proposed activity must recognize the building, structure, object or site as a product of its own time and avoid alterations that seek to create an earlier or later appearance;
☒	☐	☐	(4)	The proposed activity must preserve the distinguishing qualities or character of the building, structure, object or site and its environment;
☒	☐	☐	(5)	The proposed activity must maintain or replicate distinctive stylistic exterior features or examples of skilled craftsmanship that characterize the building, structure, object or site;
☒	☐	☐	(6)	New materials to be used for any exterior feature excluding what is visible from public alleys must be visually compatible with, but not necessarily the same as, the materials being replaced in form, design, texture, dimension and scale;
☒	☐	☐	(7)	The proposed replacement of exterior features, if any, should be based on an accurate duplication of features, substantiated by available historical, physical or pictorial evidence, where that evidence is available, rather than on conjectural designs or the availability of different architectural elements from other structures;
☒	☐	☐	(8)	Proposed additions or alterations must be done in a manner that, if removed in the future, would leave unimpaired the essential form and integrity of the building, structure, object or site;
☒	☐	☐	(9)	The proposed design for any exterior alterations or addition must not destroy significant historical, architectural, archaeological or cultural material, including but not limited to siding, windows, doors and porch elements;
☒	☐	☐	(10)	The proposed alteration or addition must be compatible with the massing, size, scale material and character of the property and the context area; and
☒	☐	☐	(11)	The distance from the property line to the front and side walls, porches, and exterior features of any proposed addition or alteration must be compatible with the distance to the property line of similar elements of existing contributing structures in the context area.

HEIGHTS DESIGN GUIDELINES

☒	☐	☐	In accordance with Sec. 33-276, the proposed activity must comply with the City Council approved Design Guidelines.

DRAFT

ITEM B8 | November 5, 2026 | 1235 Allston Street
HPO File #: HP2026_0308 | Houston Heights West

HEIGHTS DESIGN GUIDELINES MEASURABLE STANDARDS

S D NA S - satisfies D - does not satisfy NA - not applicable

☒ ☐ ☐ Maximum Lot Coverage (Addition and New Construction)

Existing Lot Size: 6600 square feet
Max Lot Coverage Allowed: 2640 square feet
Proposed Lot Coverage / Coverage %: 2046 = 31%

☒ ☐ ☐ Maximum Floor Area Ratio (Addition and New Construction)

Existing Lot Size: 6600 square feet
Max FAR Allowed: 2904 - 44%
Proposed Lot Coverage / Coverage %: 2852 square feet = 43%

☒ ☐ ☐ Side Wall Length and Insets (Addition and New Construction)

MEASUREMENT	APPLICATION
50 FT.	Maximum side wall length without inset (1-story)
40 FT.	Maximum side wall length without inset (2-story)
1 FT.	Minimum depth of inset section of side wall (1-story)
2 FT.	Minimum depth of inset section of side wall (2-story)
6 FT.	Minimum length of inset section of side wall

Side Wall Length: 43'
Inset on right side: 1'
Inset on left side: 1'

☒ ☐ ☐ Side Setbacks (Addition and New Construction)

MEASUREMENT	APPLICATION
3 FT.	Minimum distance between side wall and the property line (for lots less than 35 feet wide)
5 FT.	Minimum distance between the side wall and the property line
REMAINING	Difference between minimum side setback of 5 feet and minimum cumulative side setback
6 FT.	Minimum cumulative side setback (for lots less than 35 feet wide)
10 FT.	Minimum cumulative side setback (1-story house)
15 FT.	Minimum cumulative side setback (2-story house)

Proposed side setback (right) side: 7'
Proposed side setback (left) side: 18'
Cumulative side setback: 25'

☒ ☐ ☐ Eave Height (Addition and New Construction)

PRIMARY BUILDING (2-STORY)	
MEASUREMENT	**APPLICATION**
20 FT.	Maximum 2-story eave height (at 5 FT. minimum side setback)
22 FT.	Maximum 2-story eave height (at 7 FT. or greater side setback)

Proposed eave height: 22'

☒ ☐ ☐ Front Setbacks (New Construction)

The setback is the distance from the property line to the front wall, porch, or exterior feature.

Proposed front setback: NA

☒ ☐ ☐ Front Wall Width and Insets (New Construction)

MEASUREMENT	APPLICATION
30 FT.	Maximum front wall width before inset
4 FT.	Minimum width of inset section of front wall
40 FT.	Maximum width of 1-story building (for lots ≤ 50 FT. wide)
35 FT.	Maximum width of 2-story building (for lots ≤ 50 FT. wide)
50 FT.	Maximum width of building (for lots ≤ 50 FT. wide)

Max front wall width: NA
Max front wall depth: NA

☒ ☐ ☐ Front Porch Width and Depth (Addition and New Construction)

The width of a porch is measured between the corners of the porch foundation at the front of the porch.

MEASUREMENT	APPLICATION
6 FT.	Minimum depth of front porch
50%	Minimum percentage of front wall width covered by porch

Proposed front porch width: NA
Proposed front porch depth: NA

☒ ☐ ☐ Porch Eave Height (Addition and New Construction)

MEASUREMENT	APPLICATION
9-11 FT.	Minimum and maximum 1-story porch eave height

Proposed porch eave height: NA

☒ ☐ ☐ Building Wall (Plate) Height (Addition and New Construction)

MEASUREMENT	APPLICATION
36 IN.	Maximum finished floor height (as measured at front of structure)
10 FT.	Maximum first floor plate height
9 FT.	Maximum second floor plate height

DRAFT

ITEM B8 November 5, 2026 1235 Allston Street
HPO File #: HP2026_0308 Houston Heights West

Proposed finished floor: 2’ 9”
Proposed first floor plate height: 11’
Proposed second floor plate height: 4’ 6”

☒ ☐ ☐ Rear Setbacks (Addition and New Construction)

MEASUREMENT	APPLICATION
3 FT.	Minimum setback from rear property line
0 FT.	Front-facing garage (with rear wall at alley)
20 FT. (24 FT. preferred)	Minimum clearance from alley-loading garage from either an opposing alley-loading garage door, rear wall of a front-facing garage, or fence

Proposed rear setback: 6’ 6”

☒ ☐ ☐ Detached Garage Ridge Height (New Construction)

DETACHED GARAGE (1-STORY)	
MEASUREMENT	APPLICATION
16 FT.	Maximum 1-story garage ridge height

DETACHED GARAGE (2-STORY)	
MEASUREMENT	APPLICATION
20 FT.	Maximum 2-story garage ridge height (for garage apartment)

Proposed ridge height: NA

DRAFT

CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission

ITEM B8
HPO File #: HP2026_0308

November 5, 2026

1235 Allston Street
Houston Heights West

DISTRICT MAP



ITEM B8
HPO File #: HP2026_0308

November 5, 2026

1235 Allston Street
Houston Heights West

INVENTORY PHOTO



CURRENT PHOTO




DRAFT

ITEM B8
HPO File #: HP2026_0308

November 5, 2026

1235 Allston Street
Houston Heights West

CONTEXT AREA

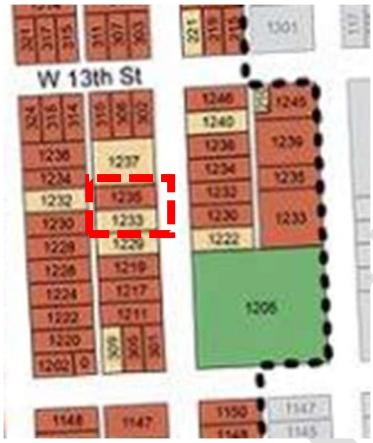

1237 Allston St – Non-Contributing 1-Story



1233 Allston St – Non-Contributing 1-Story



1232 Allston St – Contributing 1-Story



1234 Allston St – Contributing 1.5-Story



DRAFT

ITEM B8
HPO File #: HP2026_0308

November 5, 2026

1235 Allston Street
Houston Heights West

3D RENDERING





ITEM B8
HPO File #: HP2026_0308

November 5, 2026

1235 Allston Street
Houston Heights West

WINDOW & DOOR SCHEDULES

WINDOW SCHEDULE (PROPOSED HISTORICAL)

TAG	PHASE CREATED	COUNT	SIZE WIDTH	SIZE HEIGHT	SUFFIX	HEAD HEIGHT	MAT	COMMENTS
LEVEL 01 - FLOOR								
F	PROPOSED	17	32"	78"	SH	8' - 6"	WOOD	
G	PROPOSED	2	32"	78"	SH	8' - 6"	WOOD	TEMP
H	PROPOSED	1	36"	72"	SH	8' - 6"	WOOD	TEMP
I	PROPOSED	1	48"	54"	SH	8' - 6"	WOOD	
APARTMENT - FLOOR								
J	PROPOSED	1	30"	52"	SH	7' - 2"	WOOD	TEMP
K	PROPOSED	6	32"	68"	SH	7' - 2"	WOOD	
L	PROPOSED	1	32"	68"	SH	7' - 2"	WOOD	TEMP
PR LEVEL 02 - FLOOR								
E	EXISTING	3	30"	18"	FX	3' - 8"	WOOD	ATTIC
M	PROPOSED	2	32"	42"	FX	3' - 8"	WOOD	TEMP
N	PROPOSED	1	32"	42"	SH	7' - 6"	WOOD	
O	PROPOSED	6	32"	72"	SH	7' - 6"	WOOD	
P	PROPOSED	2	32"	42"	SH	7' - 6"	WOOD	TEMP

DOOR SCHEDULE (PROPOSED HISTORICAL)

TAG	PHASE CREATED	COUNT	DOOR SIZE WIDTH	DOOR SIZE HEIGHT	SUFFIX	COMMENTS
GARAGE - FLOOR						
08	PROPOSED	1	3' - 0"	8' - 0"		
09	PROPOSED	1	18' - 0"	8' - 0"	GARAGE	
LEVEL 01 - FLOOR						
01	EXISTING	1	3' - 0"	6' - 8"		
10	PROPOSED	1	2' - 6"	6' - 8"	DD	
11	PROPOSED	2	3' - 0"	6' - 8"	DD	
12	PROPOSED	3	2' - 6"	8' - 0"	SP	
13	PROPOSED	2	2' - 8"	8' - 0"	SP	
08	PROPOSED	1	3' - 0"	8' - 0"		TEMP
14	PROPOSED	1	3' - 0"	8' - 0"	SP SP	
15	PROPOSED	1	5' - 0"	6' - 8"	DPD	
APARTMENT - FLOOR						
03	PROPOSED	1	2' - 6"	6' - 8"	SP	
04	PROPOSED	1	2' - 8"	6' - 8"	SP	
16	PROPOSED	1	3' - 0"	6' - 8"	DD	
06	PROPOSED	1	3' - 0"	6' - 8"	SP	
07	PROPOSED	1	4' - 0"	6' - 8"	DD	
PR LEVEL 02 - FLOOR						
03	PROPOSED	6	2' - 6"	6' - 8"	SP	
04	PROPOSED	2	2' - 8"	6' - 8"	SP	

DRAFT

CERTIFICATE OF APPROPRIATENESS


Reviewed by the Houston Archaeological and Historical Commission


ITEM B8
HPO File #: HP2026_0308

November 5, 2026

1235 Allston Street
Houston Heights West

SITE PLAN

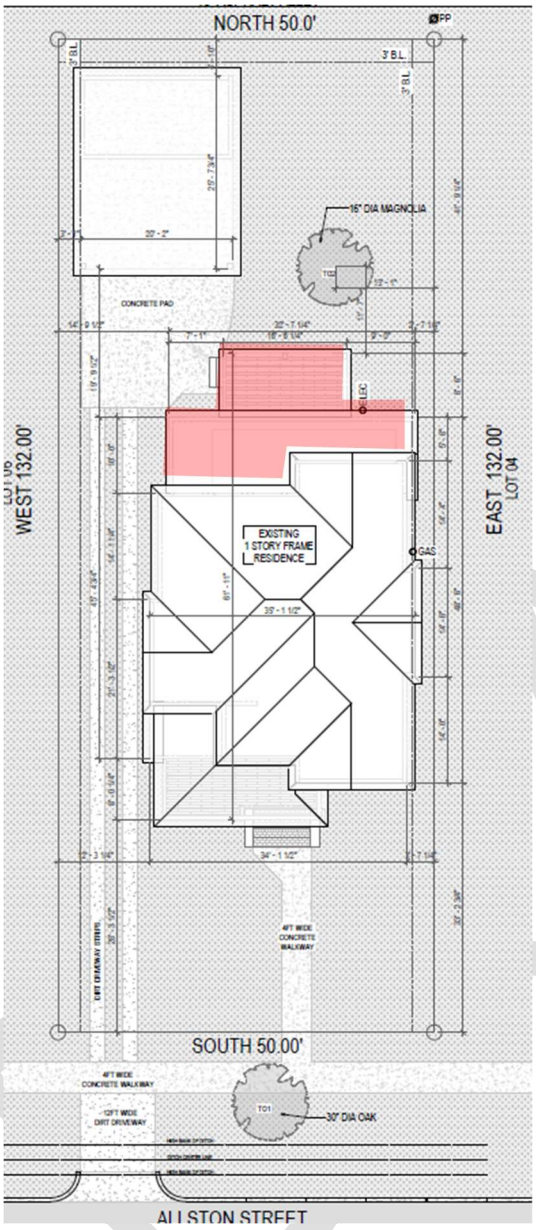

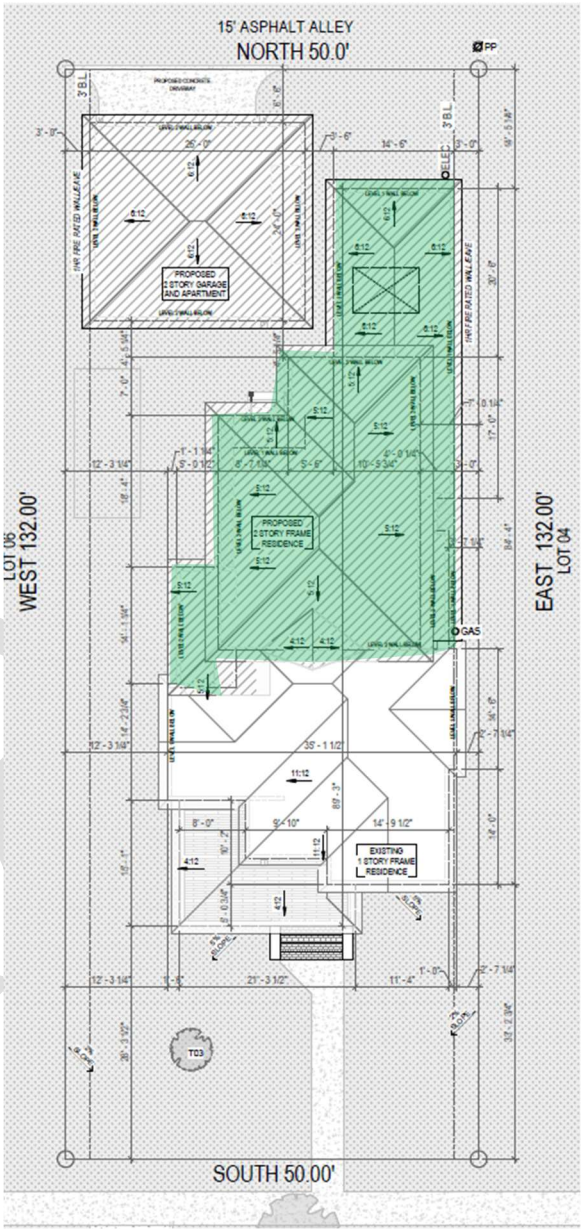

CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission


ITEM B8
HPO File #: HP2026_0308

November 5, 2026


1235 Allston Street
Houston Heights West

FLOOR PLAN (1st)

EXISTING

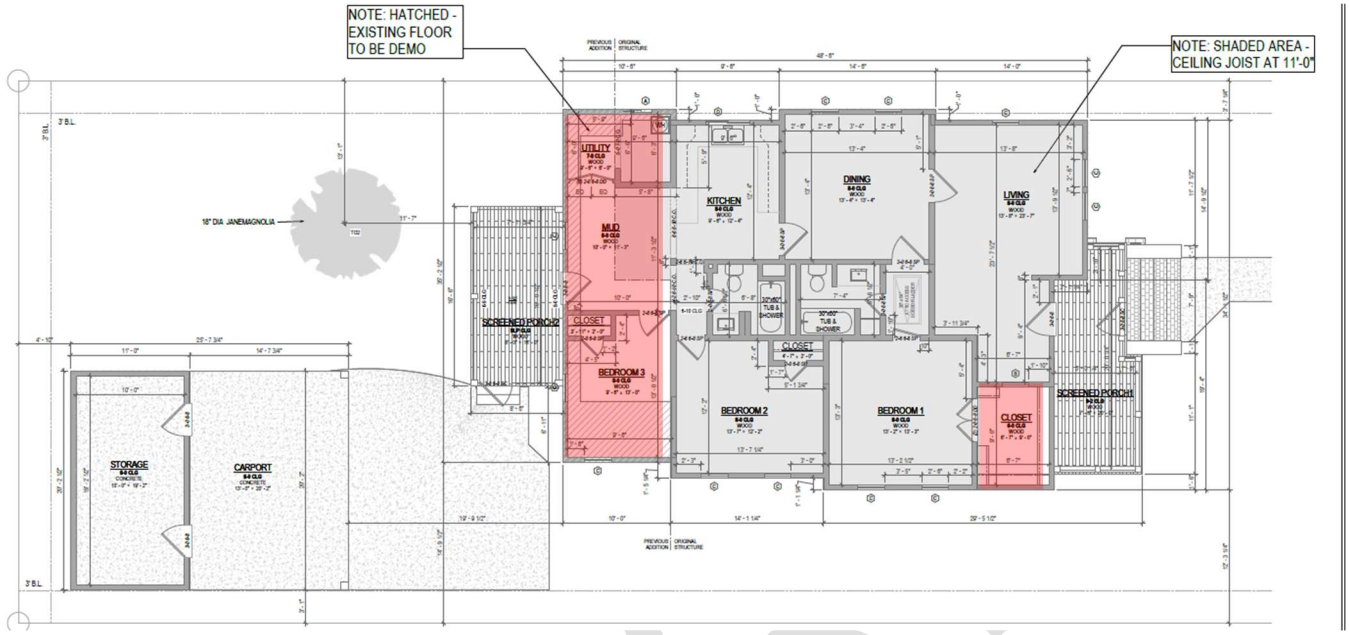

PROPOSED

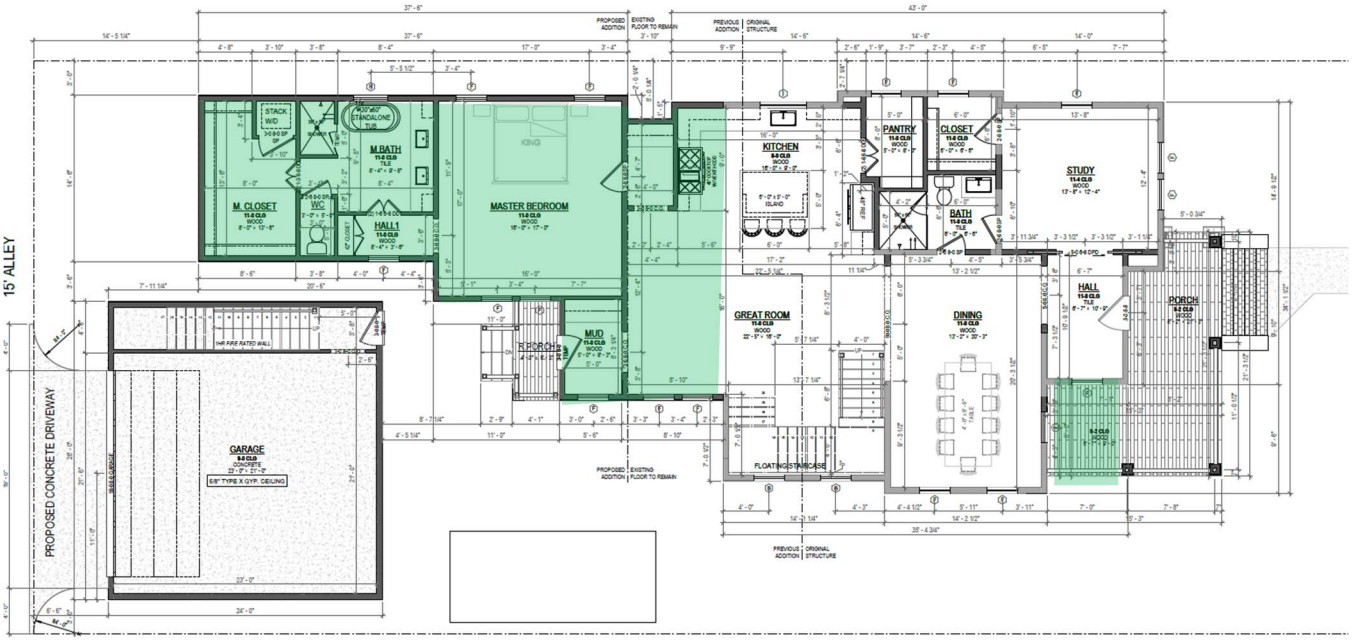

CERTIFICATE OF APPROPRIATENESS


Reviewed by the Houston Archaeological and Historical Commission

ITEM B8
HPO File #: HP2026_0308


November 5, 2026

1235 Allston Street
Houston Heights West

PROPOSED FLOOR PLAN (2nd)

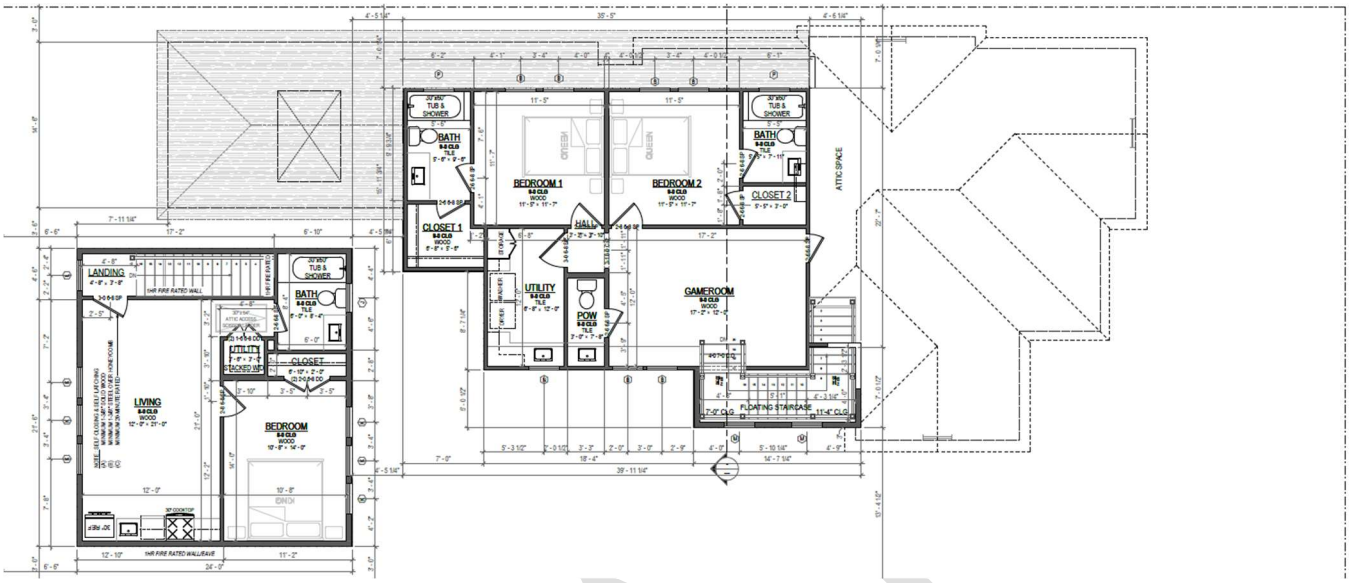

DEMO PLAN

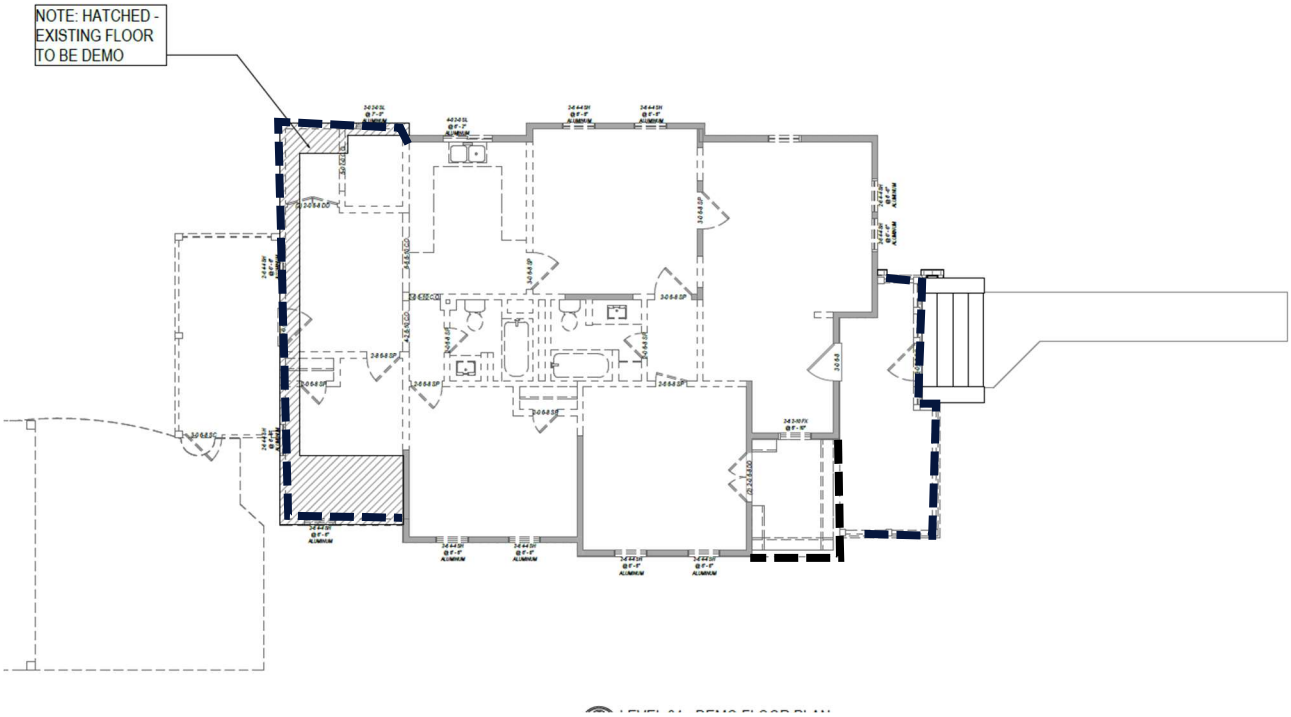


ITEM B8
HPO File #: HP2026_0308

November 5, 2026

1235 Allston Street
Houston Heights West


FRONT (EAST) ELEVATIONS

EXISTING

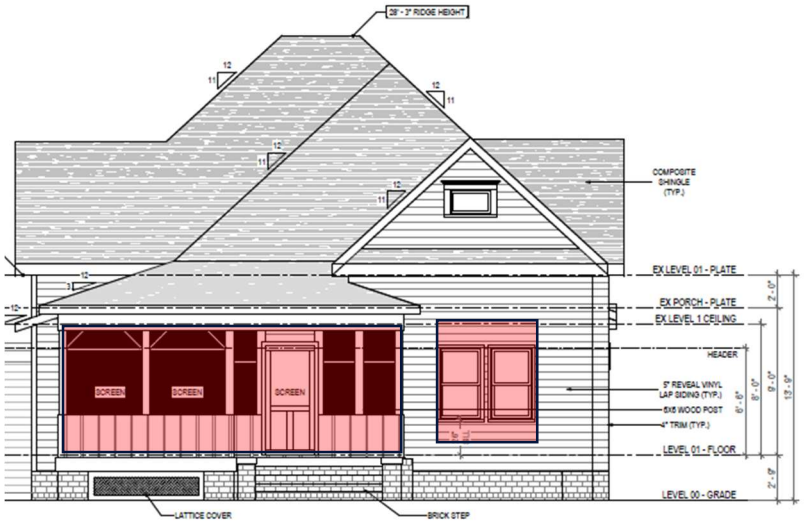

EXISTING EAST ELEVATION
Scale: 1/4" = 1'-0"

PROPOSED

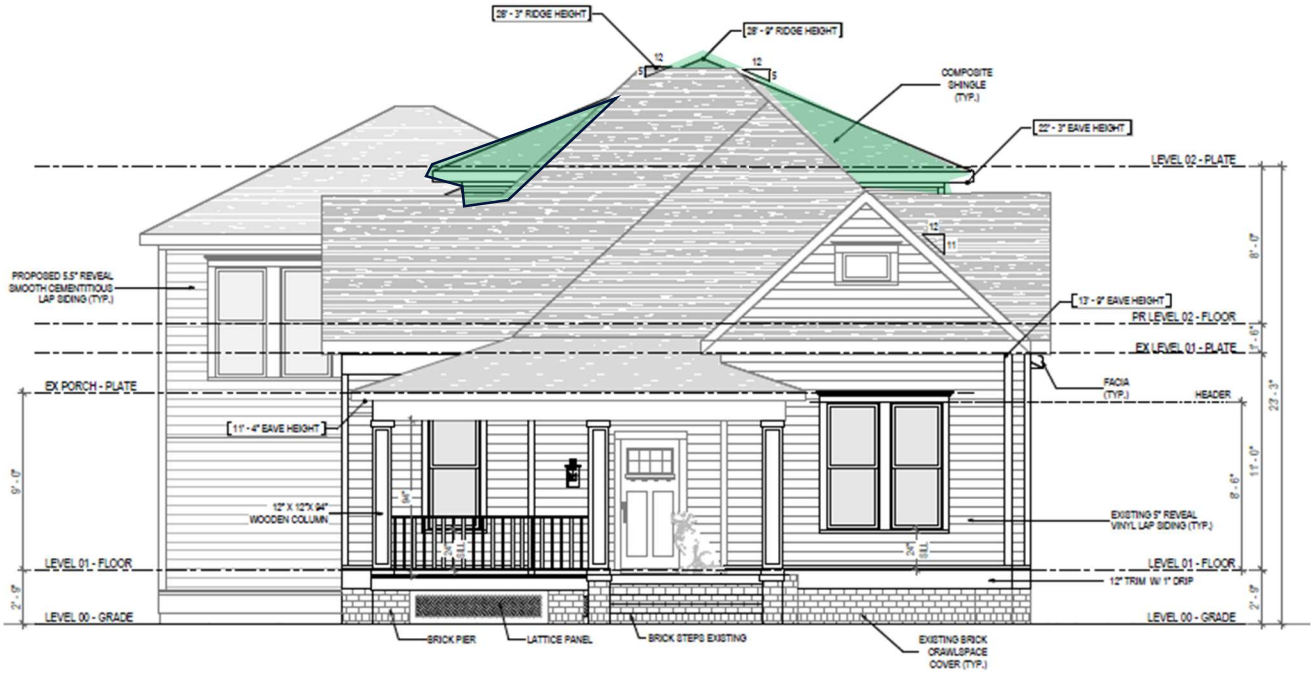

CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission

ITEM B8
HPO File #: HP2026_0308

November 5, 2026

1235 Allston Street
Houston Heights West

LEFT (SOUTH) ELEVATION

EXISTING



PROPOSED



DRAFT

CERTIFICATE OF APPROPRIATENESS

Reviewed by the Houston Archaeological and Historical Commission


ITEM B8
HPO File #: HP2026_0308

November 5, 2026

1235 Allston Street
Houston Heights West

RIGHT (EAST) ELEVATIONS

EXISTING

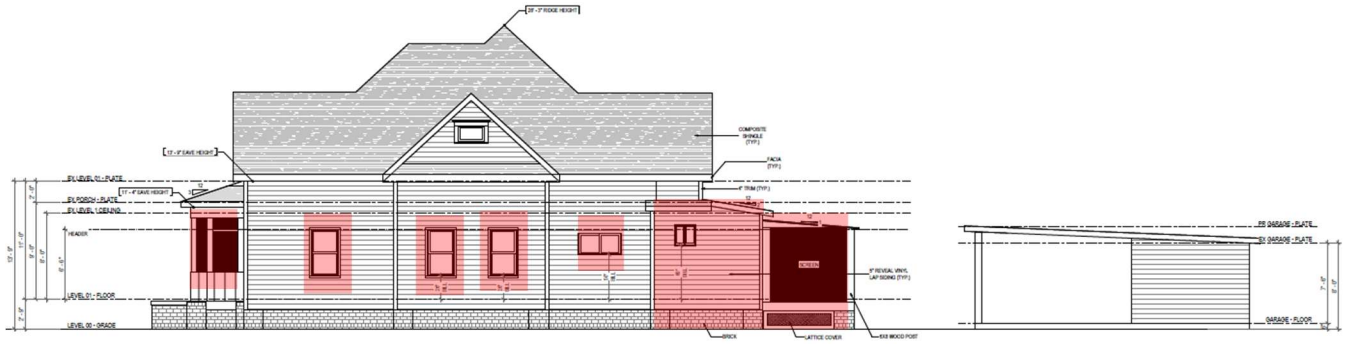

PROPOSED



DRAFT


ITEM B8
HPO File #: HP2026_0308

November 5, 2026


1235 Allston Street
Houston Heights West

REAR (NORTH) ELEVATION

EXISTING

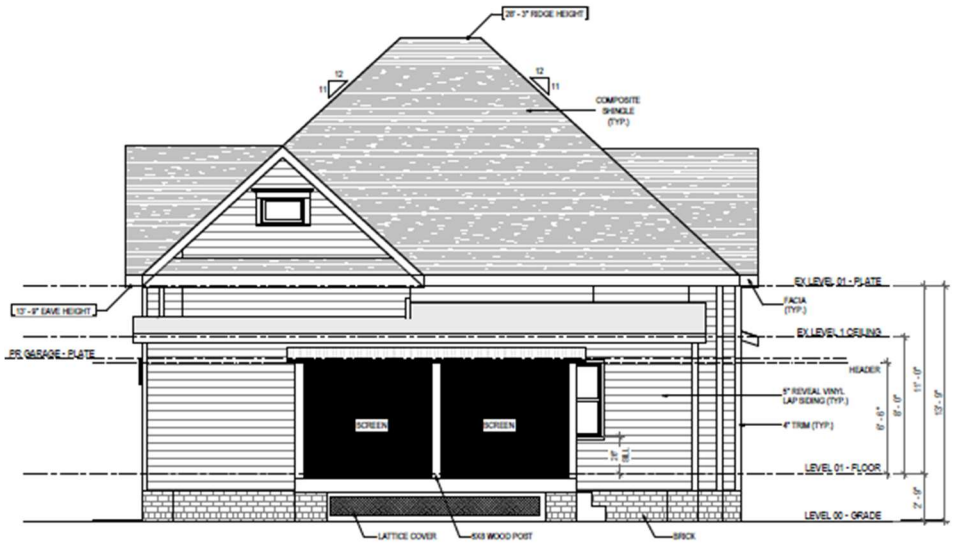

PROPOSED

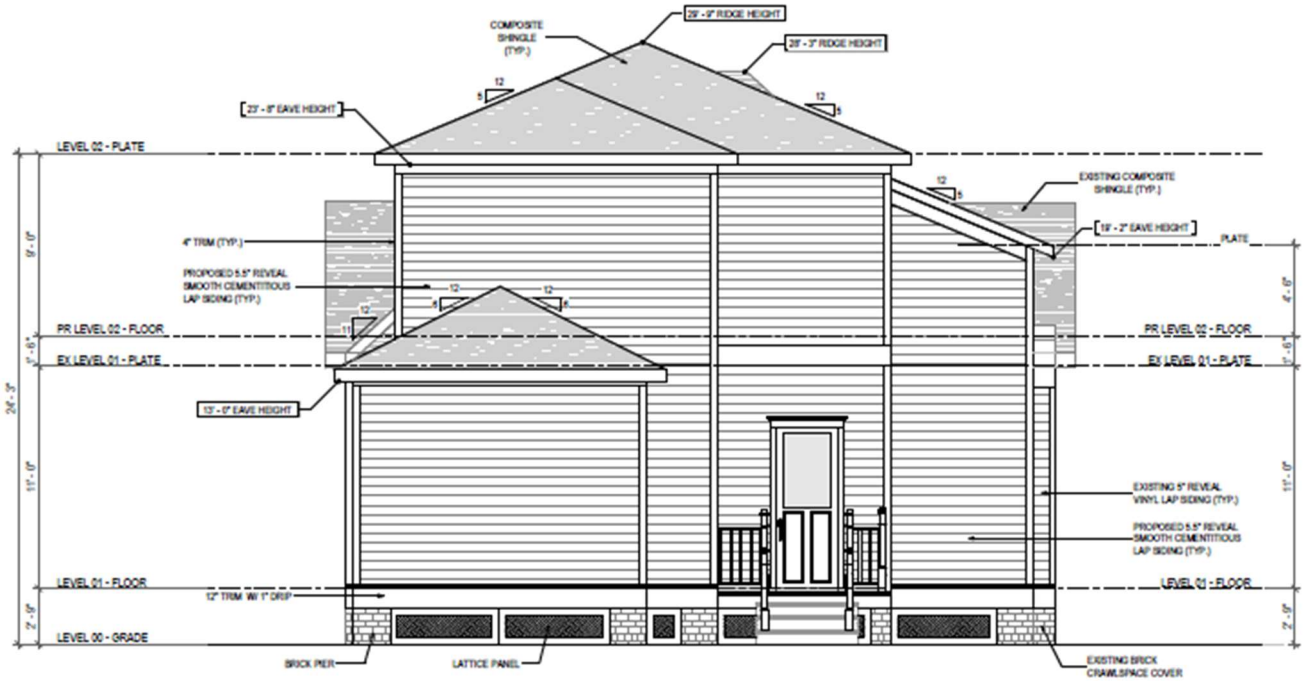


ITEM B8
HPO File #: HP2026_0308

November 5, 2026


1235 Allston Street
Houston Heights West

ROOF PLAN

EXISTING

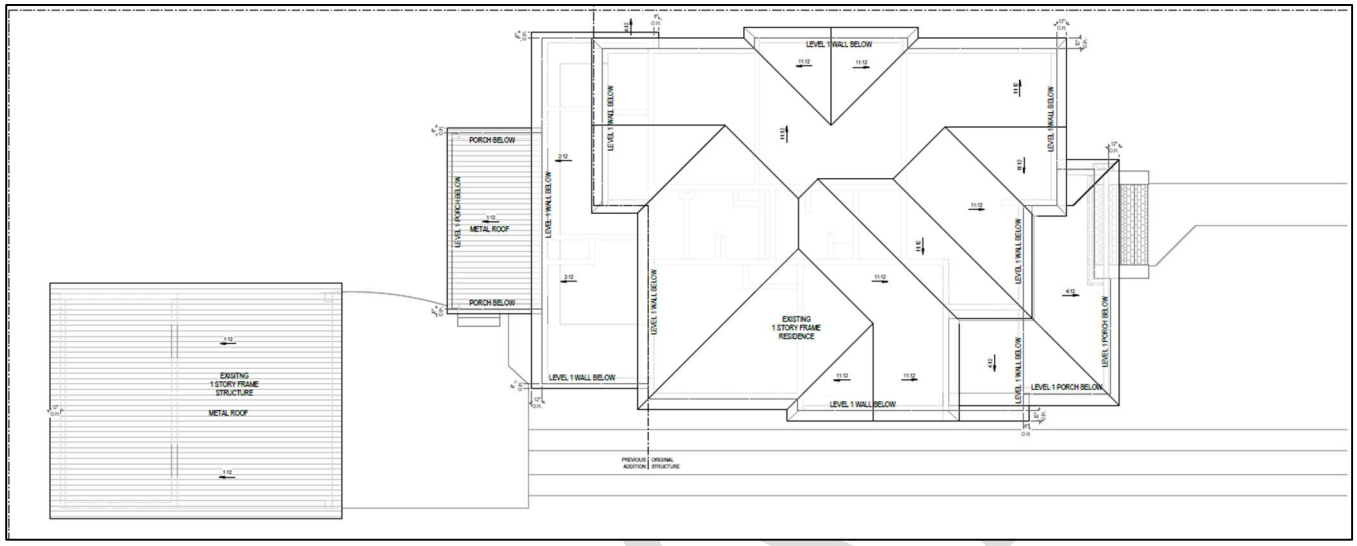

PROPOSED

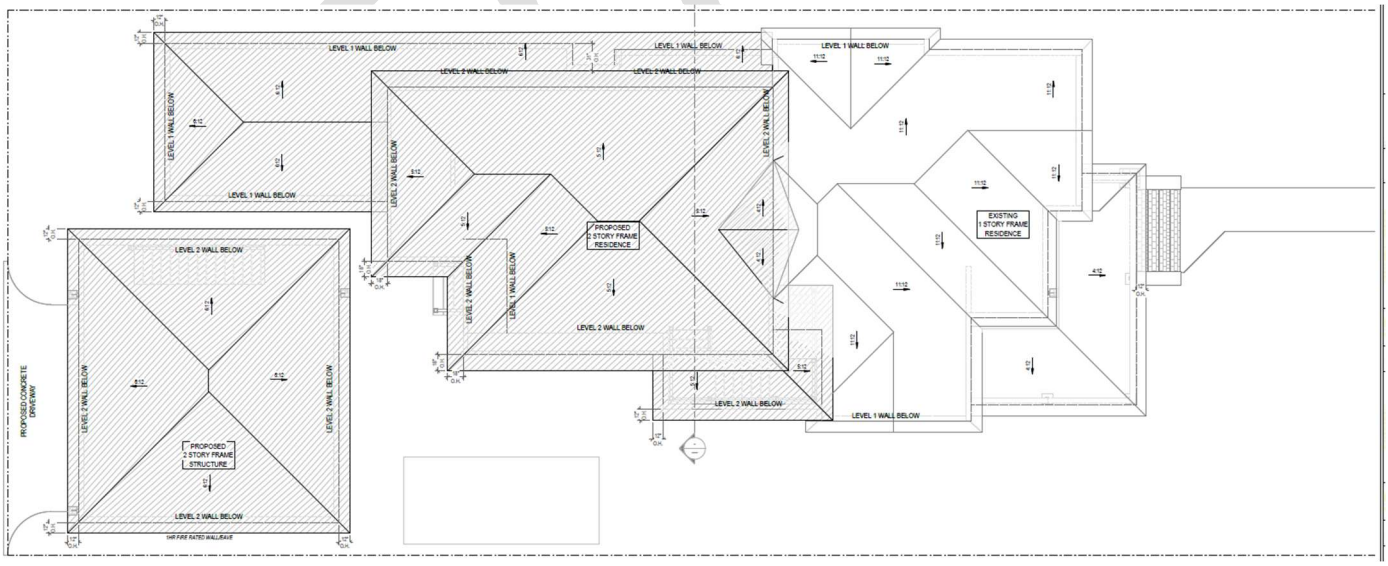

ITEM B8 November 5, 2026 1235 Allston Street
HPO File #: HP2026_0308 Houston Heights West

Existing Metal Windows and Vinyl Siding



ITEM B8
HPO File #: HP2026_0308

November 5, 2026

1235 Allston Street
Houston Heights West

Existing Metal Front Door




ITEM B8
HPO File #: HP2026_0308

November 5, 2026

1235 Allston Street
Houston Heights West

ATTACHMENT A

Historic Window Standard: New Construction & Replacement

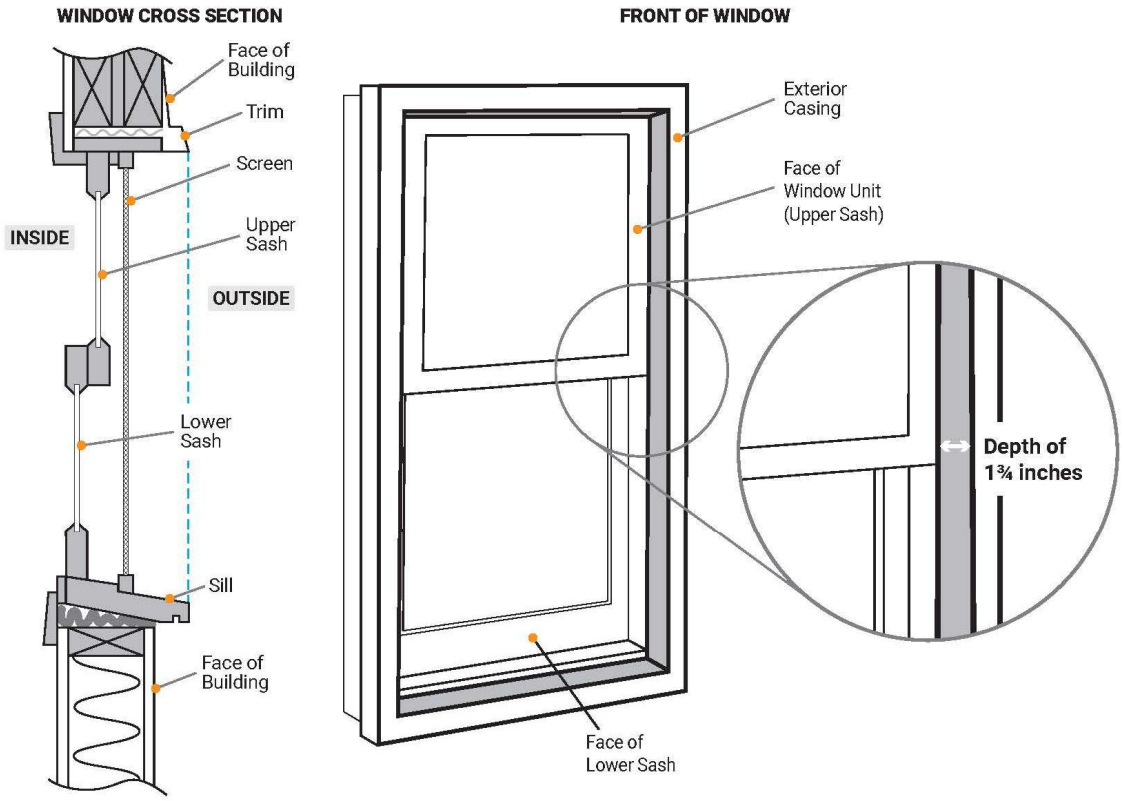

Minimum 1¾ inch Inset

- Depth from Exterior Casing to the Face of the Window Unit (Upper Sash)
- Windows must be 1-over-1 (equally horizontally divided)
- 1¾ inch minimum inset for Fixed Window

For more information contact: Houston Office of Preservation

832-393-6556

historicpreservation@houstontx.gov

City of Houston | Planning and Development | Houston Office of Preservation